

GEN_VMT PENRAY 01 Panels

Public Spaces / Workspaces / Hi-Fi & Home Cinema





Description: _

PENRAY 01 Panels, part of the distinguished GEN_VMT collection recognized by the Red Dot Product Design Award 2020, offer an exceptional solution for covering expansive surfaces. Comprising three distinct modules, the possibilities for combinations are truly limitless.

Features: __

- Light weight
- Easy to Install
- Easy to clean and maintain
- High Performance in medium and high frequencies

Available Finishes*: __

GEN_VMT Colors



*Different batches may show a color variation



Dimensions (L x H x W): __

• 600 x 705 x 20mm

Packaging Information: ___

Units/Box

Box Gross Weight: 3.05 kg

Installation: _

Fixation : Silicon Sealant

Place : Wall Raw Material: Pet Wool

Performance: _


Functionality : Absorption

Absorption Frequency : Medium and High Frequencies

NRC : 0.30



Acoustic Performance: ___



Fire Compliance: _____

- ASTM-E84 Class A
- BS 476 Part 6 & 7 Class 1
- EN-13501 Part 1 C, s2, d0

Certifications: _





 $Color \ combinations \ are \ available \ upon \ request, \ subject \ to \ minimum \ order \ quantity \ (MOQ).$

Please note that the dimensions of these panels have a tolerance of +/- $2\mbox{mm}.$

Do not apply these panels behind radiators or too close to a heat source.

A slight color variation may occur between different batches.

The product images used are illustrative and may differ from the actual product.



GEN_VMT PENRAY O1 Tiles

Public Spaces / Workspaces / Hi-Fi & Home Cinema



Description: _

This collection features small tiles comprising two distinct modules, ingeniously designed to interlock and create both regular and irregular grids. Exploring a myriad of colors and combinations, these tiles offer an ideal solution for compact spaces.

Features: ___


- Light weight
- Easy to Install
- Easy to clean and maintain
- High Performance in medium and high frequencies

Available Finishes*: —

GEN_VMT Colors



*Different batches may show a color variation

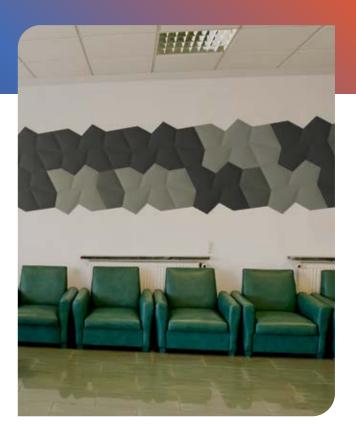

Dimensions (L x H x W): _

■ Tile 1: 470 x 400 x 12 mm

■ Tile 2: 230 x 320 x 20 mm

Packaging Information: ___

Units/Box Box Gross Weight: 1.8 kg

Installation: __

Fixation : Silicon Sealant

Place : Wall Raw Material : Pet Wool

Performance: __


Functionality : Absorption

Absorption Frequency : Medium and High Frequencies

NRC : 0.30



Acoustic Performance: ___



Fire Compliance: _____

- ASTM-E84 Class A
- BS 476 Part 6 & 7 Class 1
- EN-13501 Part 1 C, s2, d0

Certifications:





 $Color \ combinations \ are \ available \ upon \ request, \ subject \ to \ minimum \ order \ quantity \ (MOQ).$

Please note that the dimensions of these panels have a tolerance of +/- $2\mbox{mm}.$

Do not apply these panels behind radiators or too close to a heat source.

A slight color variation may occur between different batches.

The product images used are illustrative and may differ from the actual product.



GEN_VMT PENRAY 02 Tiles

Public Spaces / Workspaces / Hi-Fi & Home Cinema





Description:

Presented in four distinct shapes, these tiles offer a customizable experience, allowing individuals to combine them according to their preferences. Derived from extensive geometric research in pentagonal tiling, each tile takes the form of a pentagon.

Our explorations led us to discover a shape grammar enabling the generation of limitless combinations of single or double main shapes. Furthermore, the strategic use of color enhances the potential of this generative pattern.

Features: ___


- Light weight
- Easy to Install
- Easy to clean and maintain
- High Performance in medium and high frequencies

Available Finishes*: _

GEN_VMT Colors



*Different batches may show a color variation

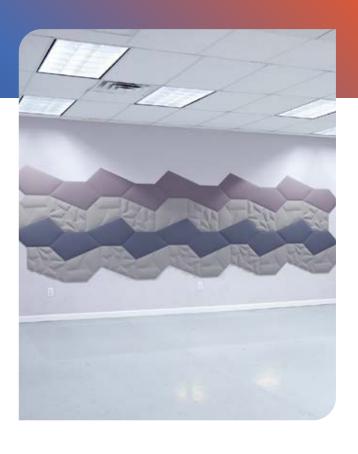

Dimensions (L x H x W): _

■ 355 x 355 x 20 mm

Packaging Information: _

Units/Box Box Gross Weight: 1.8 kg

Installation: __

Fixation : Silicon Sealant

Place : Wall Raw Material : Pet Wool

Performance: _


Functionality : Absorption

Absorption Frequency : Medium and High Frequencies

NRC : 0.30



Acoustic Performance: ___



Fire Compliance: ____

- ASTM-E84 Class A
- BS 476 Part 6 & 7 Class 1
- EN-13501 Part 1 C, s2, d0

Certifications: —





 $Color \ combinations \ are \ available \ upon \ request, \ subject \ to \ minimum \ order \ quantity \ (MOQ).$

Please note that the dimensions of these panels have a tolerance of +/- $2\mbox{mm}.$

Do not apply these panels behind radiators or too close to a heat source.

A slight color variation may occur between different batches.

The product images used are illustrative and may differ from the actual product.