



VicWallpaper VMT





VicWallpaper VMT



DESCRIPTION:


VicWallpaper VMT offers advanced acoustic and thermal isolation for residential and commercial spaces. Designed for medium to high frequencies, it enhances speech clarity in areas like meeting rooms, living rooms, and classrooms. Made from fire-rated recycled PET, VicWallpaper VMT is quick and easy to install, eliminating the need for specialized labour.

FEATURES:

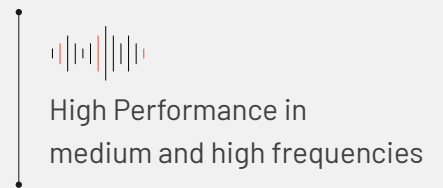


AVAILABLE FINISHES:

Colors

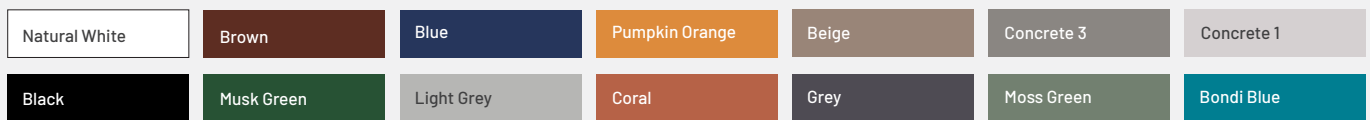

Pattern

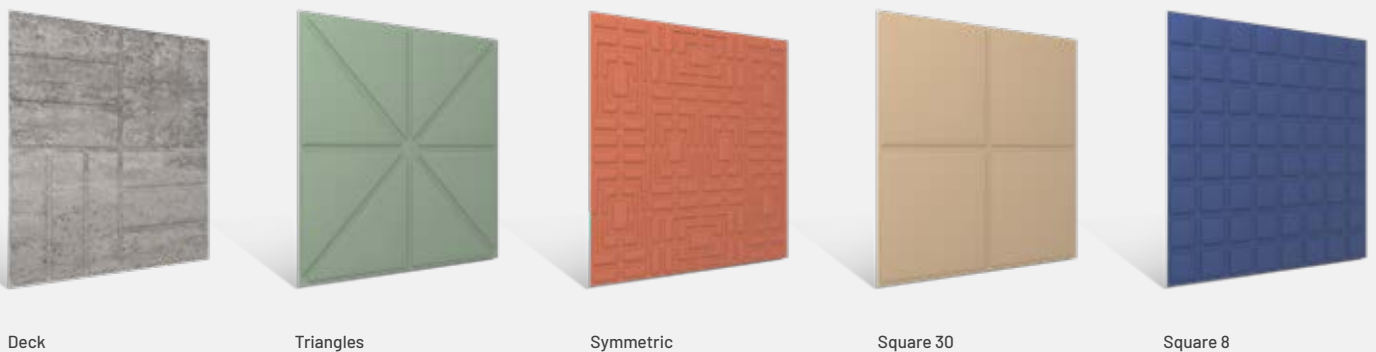

*Color customization available on request subject to MOQ.

TECHNICAL INFORMATION:

Main Info

Dimensions(L x H x W)	600 x 600 x 10 mm
	1200 x 600 x 10 mm

Installation

Fixation	Silicon Sealant
Place	Wall
Material	Pet Wool

Packaging Information

Units/Box	8
Box Gross Weight	4.4kg / 9.6kg


Performance

Functionality	Absorption
Absorption Frequency Range	Medium and High Frequencies
NRC	0.20

Fire Compliance

ASTM-E84 Class A | BS 476 Part 6 & 7 Class 1 | EN-13501 Part 1 C, s2, d0

ACOUSTIC PERFORMANCE:

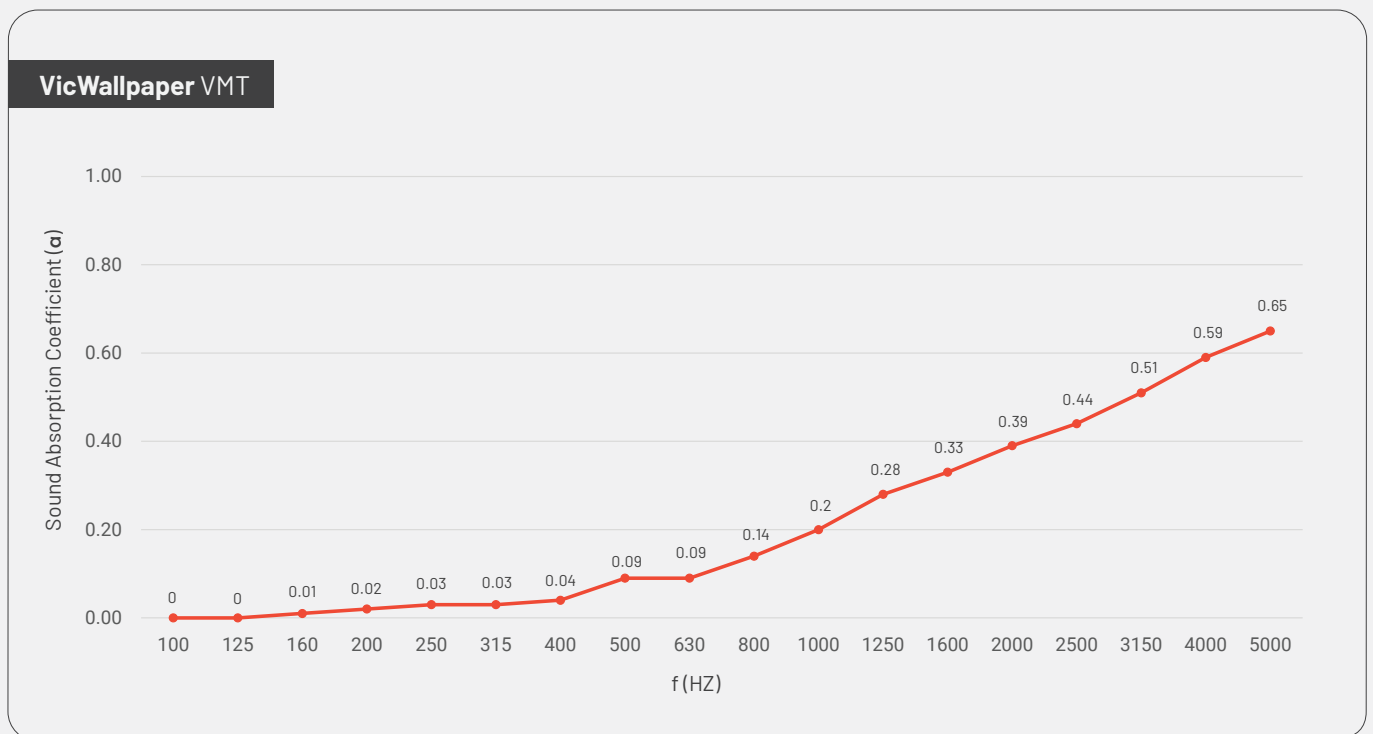

Disclaimers:

Color combinations are available upon request, subject to minimum order quantity (MOQ).

Please note that the dimensions of these panels have a tolerance of +/- 2mm.

Do not apply these panels behind radiators or too close to a heat source.

A slight color variation may occur between different batches.

The product images used are illustrative and may differ from the actual product.

VicWallpaper VMT: **SQUARE 8**



VicWallpaper VMT: **SQUARE 30**



VicWallpaper VMT: **DECK**

